

MSD-4

PT# 101012



FEATURES / BENEFITS

- ✓ Interface - EIA RS-232, CCITT V.24, DB-25 Female Connectors
- ✓ Data Rates - Synchronous or Asynchronous up to 19.2Kbps
- ✓ Anti-Streaming - Automatic or Manual for unattended Circuit Restoration
- ✓ Individual Subchannel Enable/ Disable Switches
- ✓ Visual Indication of Subchannel Activity
- ✓ Receive Data - Broadcast to all Subchannels
- ✓ Transparent to Data
- ✓ Fully Cascadable
- ✓ External Clocking
- ✓ Sturdy Metal Enclosure
- ✓ 110/220VAC Switch Selectable
- ✓ +/- 15KV ESD Protection

DESCRIPTION

The MSD-4, PT# 101012 RS-232 Modem Sharing Device provides the network manager with a cost effective means of expanding existing, leased line polled networks without adding computer ports or communications links. With the MSD-4, up to four terminals can share the same port and communications link using the contention and control protocols normally resident in the host hardware and software. Once installed, system and network efficiency are increased through higher host processor utilization coupled with the significant decrease in idle time between host / terminal traffic sessions.

Ideal for either synchronous or asynchronous network environments, the MSD-4 is protocol transparent at data rates up to 128Kbps. Data arriving at the Master Port is continually broadcast to all Subchannels. The attached terminal device that raises the RTS control signal is automatically given control of the MSD until data transmission is complete. Clocking is accomplished from the attached Modem.

The MSD-4 incorporates optional Anti-Streaming circuitry. If enabled, Anti-Streaming will automatically remove a defective terminal from service if the Data / Control criteria is present for the user predefined selection period.

Housed in a sturdy metal enclosure and equipped with an internal 110/220VAC switch selectable linear power supply, the MSD-4 will provide in excess of 100,000 hours of reliable service.

The MSD-4 have a 3-year warranty and a 24 hour turnaround on warranty repairs.



EAST COAST DATACOM, INC.

SPECIFICATIONS

Application

Multiple sync/async terminal or DTE devices operating in a polled environment, to share one Modem.

Capacity

One to four RS-232 Sync/Async devices

Interface

EIA RS-232, CCITT V.24 using DB-25 female connectors

Data Rates

Up to 19.2Kbps

Data Format

Data transparent at all data rates

Timing

External; from attached Modem

Handshaking

RTS / CTS

OR-MODE (Switch on Data)

Anti-Streaming

Automatic...Selectable time out intervals

Disable.....Selectable via dip switch

Terminal Service Modes

Rotational sequence for equal access

Priority Mode Optional

Front Panel

Indicators: Power, CTS, DCD, RXD, TXD
Channel Active

Switches: Enable/Disable of each Sub-channel

Power Source

100-120 to 200-220VAC @10%, 50/60Hz, 0.16/0.08A,
external 110/220 volt select switch, IEC Power Inlet, (2)
5mm Fuses

Dimensions

MSD-4 Alternate Chassis

Height 2.53 inches (6.426 CM)

Width 12.13 inches (30.810 CM)

Length 11.13 inches (28.270 CM)

Weight

6 pounds (2.72Kg)

MTBF

601,328 Hours

Benign Ground, Controlled, Telcordia Issue 1

Approvals

EMI Approvals

FCC 47CFR, Part 15, Subpart B for conducted emissions
from a Class A

FCC 47CFR, Part 15, Subpart B for radiated emissions
from a Class A

Safety Approvals

UL 62368

Electric Discharge Approval

IEC EN-61000-4-2

Environmental Testing Approvals

Operating Temperature: 50° to 160° F (10° to 60° C)

Operational Alt.: 0 to 2000 Meters above sea level

Operational Relative Humidity: 10% to 80%

Non-Operational Temperature: -30 degC to 70 degC

Non-Operational Alt.: 0 to 50,000 feet above sea level

Ordering Information

PT# 101012

Model: MSD-4


Description: 4-Port RS-232 Modem Sharing Device

INCLUDED WITH EACH UNIT:

- 1) Operations Manual
- 2) U.S.A. Grounded Power Cord, Part # 713015
- 3) Optional Power Cords
 - A) United Kingdom, Part # 713016
 - B) Continental Europe, Part # 713017
 - C) Other: Specify Country on Purchase Order

OPTIONAL ACCESSORIES

- 1) Spare Data Center Fuses
 - A) 160ma Fuse, Qty (2) Part # 714000
 - B) 80ma Fuse, Qty (2) Part # 714001

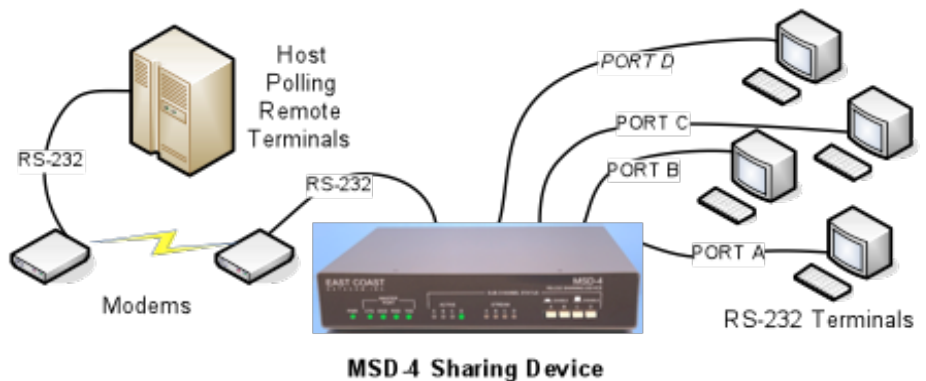

EAST COAST DATACOM, INC.

245 Gus Hipp Boulevard, STE 3 • Rockledge, FL 32955-4812 U.S.A.

TEL: (321) 637-9922

WEB SITE: www.ecdata.com

FAX: (321) 637-9980